


MODEL 3300-A

Conveyorized Automatic with PATENTED A-ARM TECHNOLOGY

FILM TAIL TREATMENT - Cousins smart engineering has developed an advanced cut and hold device, the A-Arm. It provides significant productivity gains and safety benefits. No clamp on the turntable and no hot wire film cutter that requires continuous maintenance. This technology is only available on a Cousins machine.

FILM CARRIAGE - The Load Cell Film Delivery powered Pre-stretch film carriage with load cell corner compensation - for smooth and correct film dispensing. Includes safety door with auto power cut-off switch for safe and easy film threading.

ALL ELECTRIC - no pneumatic lines or noisy air compressors required.

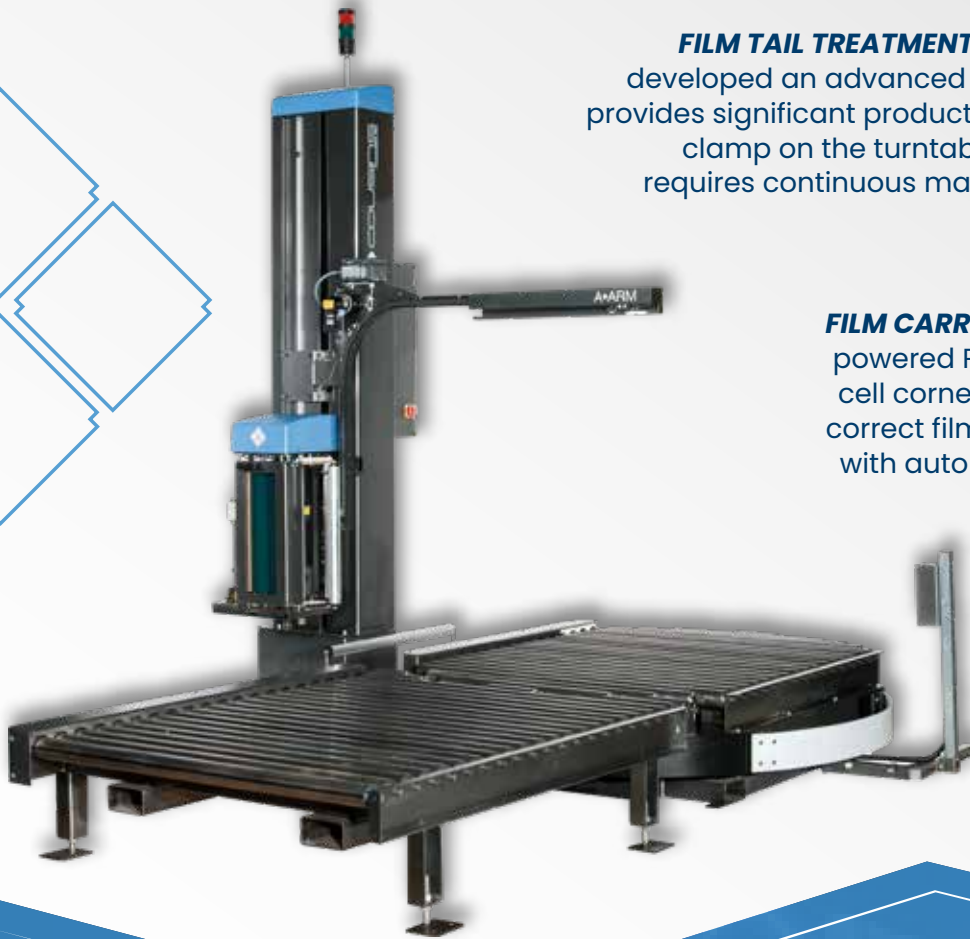

SYSTEM CONFIGURATION - Designed to be installed with existing product flow and conveyor layout design. Whether In-line or off-line, the automation package is designed to be in-line with conveyors using interface relays/logic or off-line standalone system using a wireless cycle start remote.



Tap or scan the QR code
to explore our solutions



CONTACT

TOLL FREE: 888-209-4344
INFO@COUSINSPACKAGING.COM
WWW.COUSINSPACKAGING.COM

MODEL 3300-A

DESIGN FEATURES/SPECIFICATIONS

PRODUCTION RATE

- ◆ Rated for 40 loads per hour depending on load sizes and number of wraps

LOAD CAPACITY

- ◆ 4000# Capacity
 - ◆ 48" L x 48" W x 70" H max load size
(consult factory for minimum height)
- NOTE: Larger load size options are available**

CONVEYORS

- ◆ 2.5" diameter rollers on 3" centers
- ◆ 50" effective roller width
- ◆ 16.5" standard passline height
- ◆ AC Drives

TOWER DESIGN:

- ◆ Fully Enclosed & Guarded Motors
 - ◆ No Exposed Cables
 - ◆ Heavy Duty Formed/Structural Steel
 - ◆ Electro-static powder coated paint finish
- 5 Year Warranty on Steel Fabrications**

FILM CARRIAGE:

- ◆ LOAD CELL FILM DELIVERY 20" capacity powered pre-stretch film carriage
 - ◆ Load cell corner compensation for smooth and correct film dispensing
 - ◆ 1/2 HP AC variable speed motor
 - ◆ 33% to 313% fixed stretch capability
 - ◆ Pre-stretch ratio variable using easy sprocket change
 - ◆ Safety Door with auto power cut-off switch
 - ◆ Superior film-to-roller contact area
 - ◆ Carriage Descent Obstruction Safety Shut-Off Device
- Lifetime warranty on pre-stretch rollers**

CONTROLS

- ◆ LCD Operator Interface with Diagnostics
- ◆ Separate UP/DOWN Spiral Speed Controls
- ◆ 3 Separate Wrap Programs
- ◆ Selectable Reduced Film Tension parameters for wrapping top and/or bottom of light loads
- ◆ Emergency Stop button
- ◆ NEMA 12

3 Year Warranty on Components

